


AL 710 D6 01

154138


ruck

- Innovative, high-efficiency axial fan
- Optimally tuned, CFD-optimized aerodynamics
- Housing weight optimized, powder coated
- Efficient IE3 motor, frequency controllable
- Conveyed medium temperature up to 60 °C in continuous operation
- Exceeds current ErP regulation by 15 - 20%

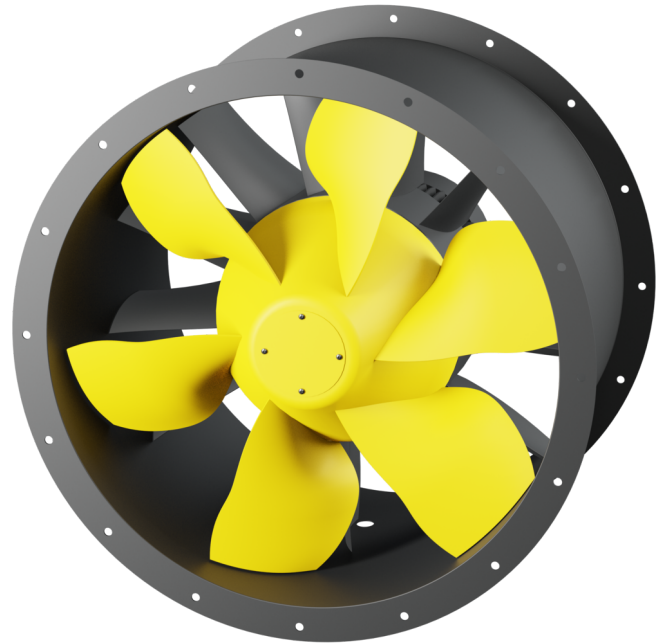

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

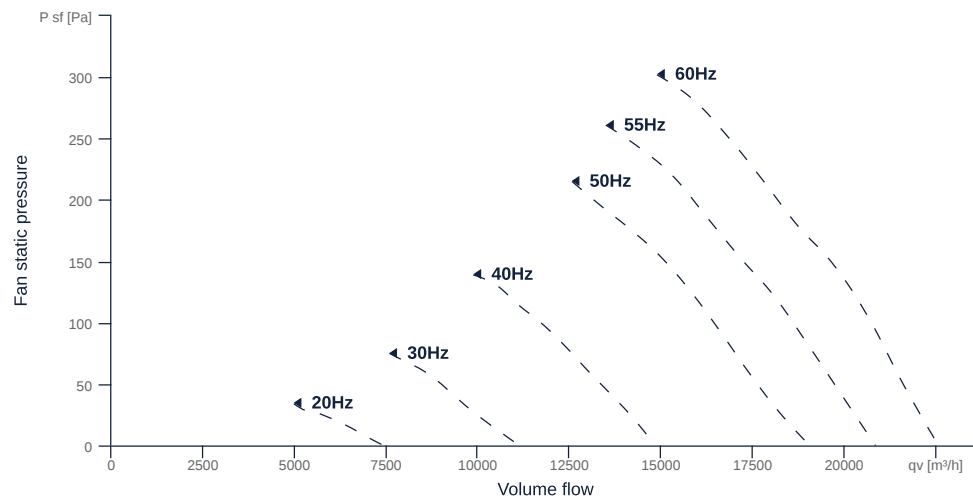

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		$W \times H_{duct}$
Pipe connection size (DN)	DN710		DN
Rated voltage (entire device)	400	V	U_{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Coated steel		matcasing
Impeller material	Coated steel		matimpeller
IP-protection class (entire device)	IPX4		IP_{compl}
IP-Protection class (terminal box)	IP55		IP_{ebox}
Weight	72.5	kg	m
Fan type	Axial		Fan _{type}
Category / Installation situation	B		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	2212	W	$P_{ed, max}$
Max. operating current (device)	4.7	A	$I_{ed, max}$
Max. speed	1180	1/min	n_{max}
Max. stat. efficiency	53.6	%	η_{es}
Max. fan efficiency	68.3	%	η_e
Max. flowrate	22569	m ³ /h	$Q_{v, max}$
Max. stat pressure	320	Pa	$p_{sf, max}$
Max. medium temperature	60	°C	$T_{m, max}$
Max. environment temperature	60	°C	$T_{amb, max}$
Min. environment temperature	-20	°C	$T_{amb, min}$




MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Number of poles (1)		6.000000		num polesw1
Connection	Δ	Y		wiringw1
Connection (wiring 2)	Y			wiringw2
Rated voltage	230	460	V	U _{rated, f1}
Rated voltage (wiring 2)	400		V	U _{rated, f2}
Rated current	9.2	4.64	A	I _{rated, f1}
Rated current (wiring 2)	5.29		A	I _{rated, f2}
Shaft power	2200	2200	W	P _{out, f1}
Shaft power (wiring 2)	2200		W	P _{out, f2}
Speed	960	1165	1/min	n _{f1}
Speed (wiring 2)	960		1/min	n _{f2}
Starting current	59.8	35.3	A	I _{start, f1}
Starting current (wiring 2)	34.4		A	I _{start, f2}
Efficiency	84.5	87.5	%	$\eta_m, f1$
Efficiency (wiring 2)	84.5		%	$\eta_m, f2$
Efficiency class	IE3	IE3		IE _{motor}
Min. temperature	-20	-20	°C	T _{motor, min}
Cos Phi	0.710000	0.680000		cos φ
UL-Certification motor		UL recognized		ULcert




CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

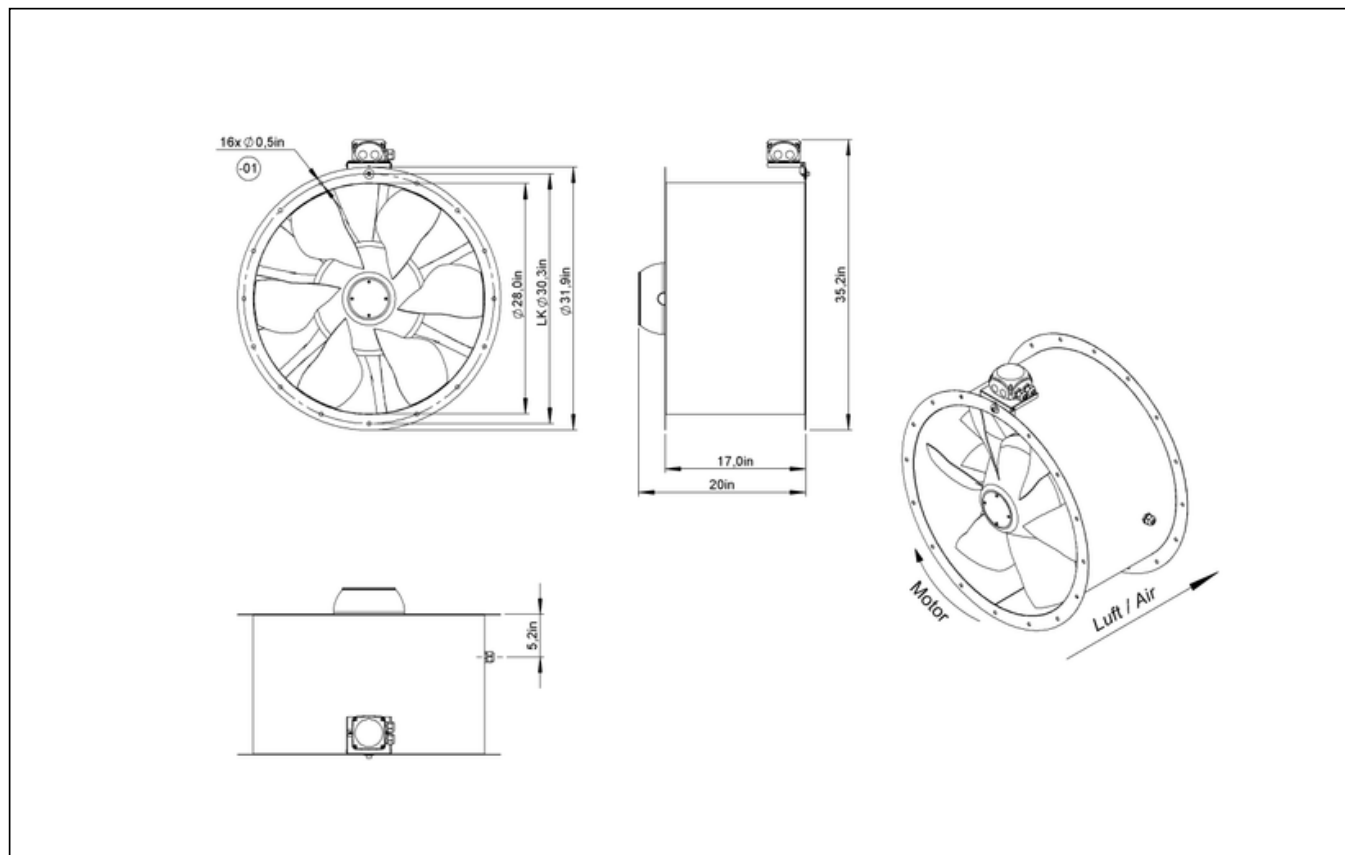


AL 710 D6 01

154138

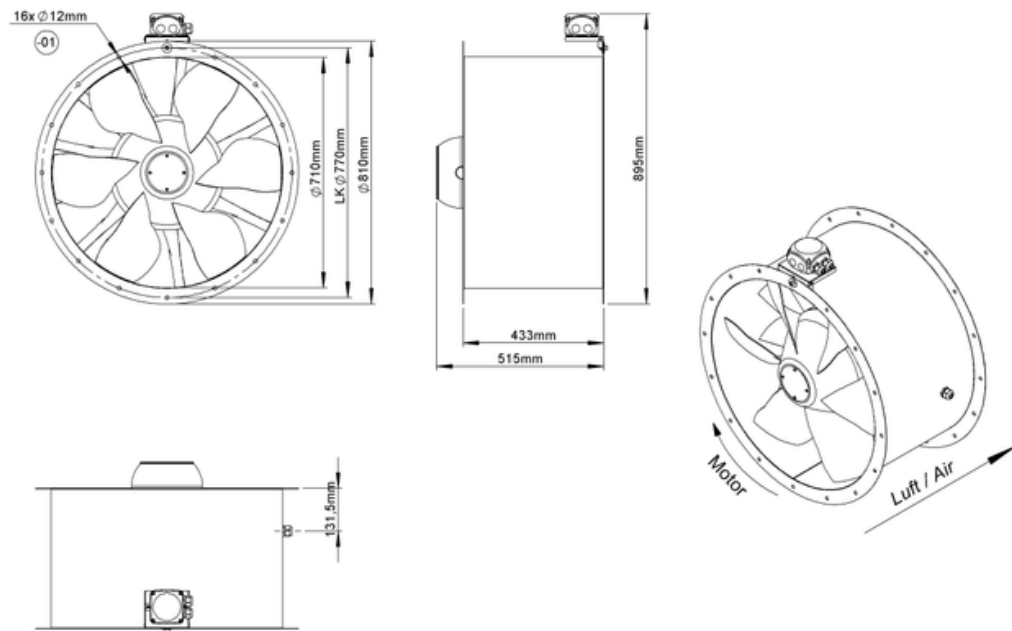



to the product detail page

AL 710 D6 01
154138

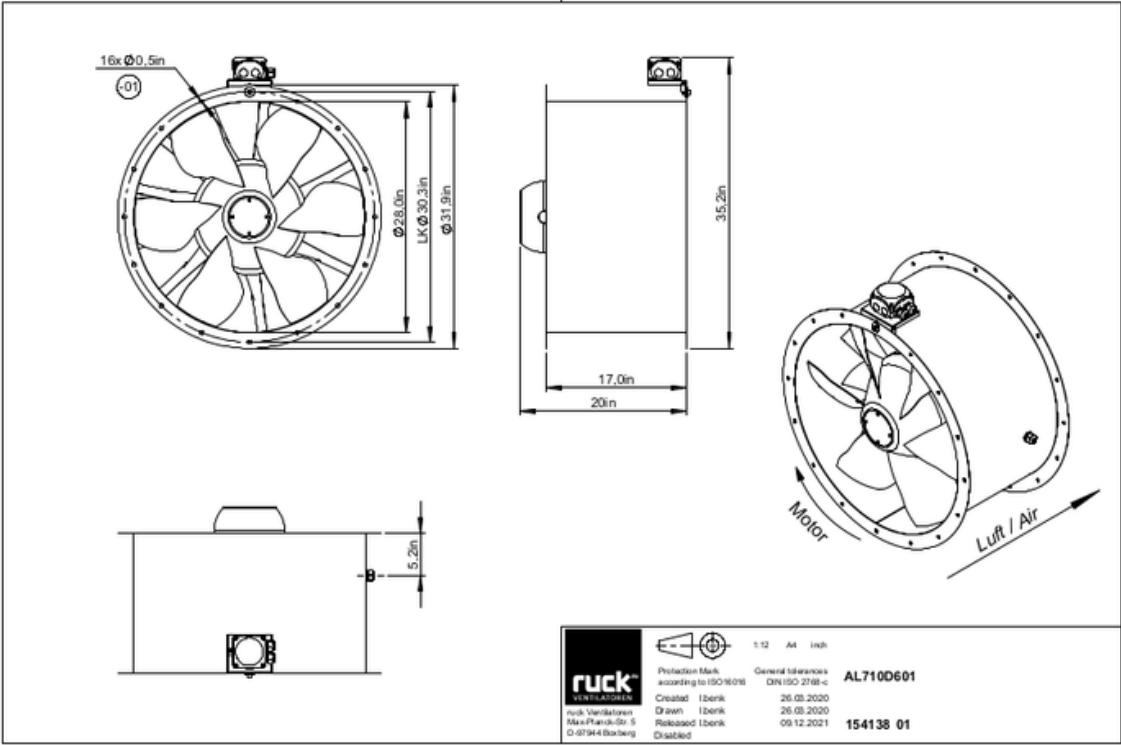

AL 710 D6 01
154138

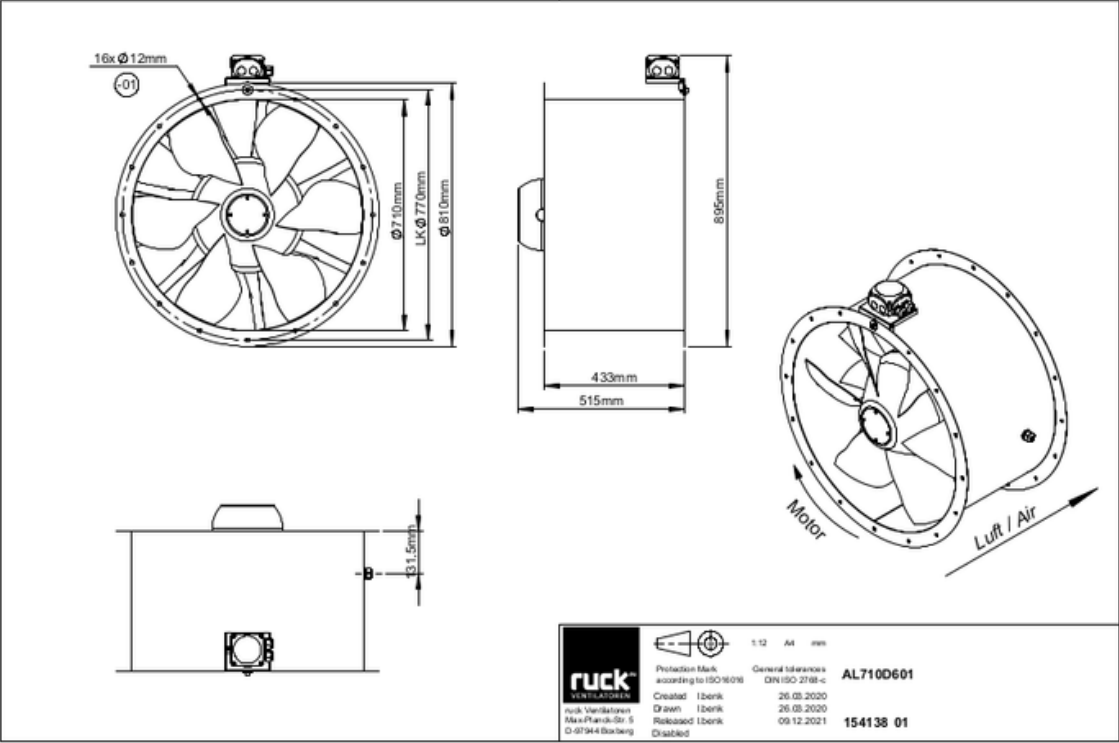

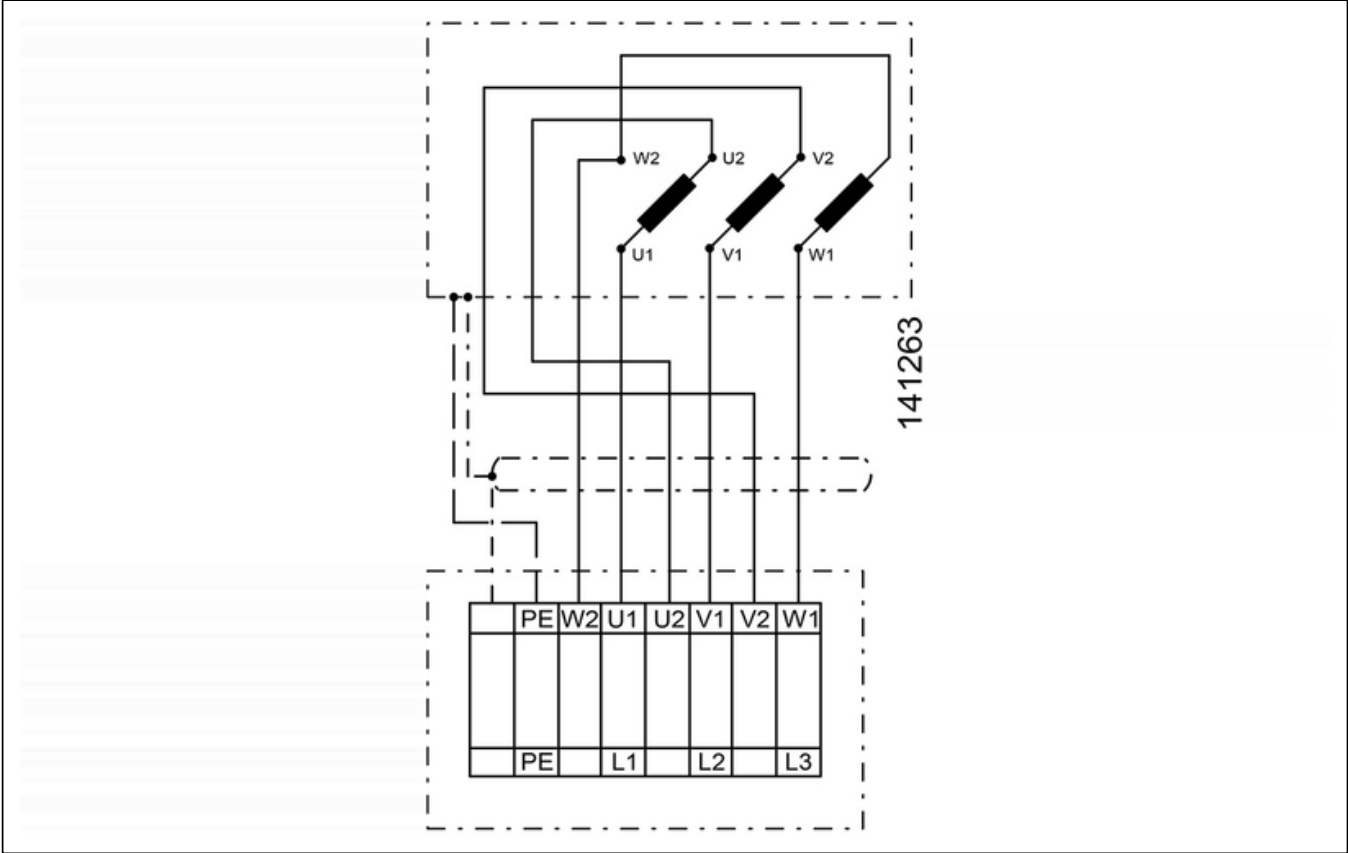

MECHANICAL ACCESSORIES

RVK 710 | 153914



- Automatic tube shutter
- Sheet steel, powder coated
- For vertical installation
- Flange mounting

RVK H 710 | 154879



- Automatic tube shutter
- Sheet steel, powder coated
- For horizontal installation
- Flange mounting

RVS 710 01 | 154201



- Tube connection spigot
- Sheet steel, powder coated
- Suitable for outdoor installation
- Flange mounting

ESD 710 | 153939




- Inlet cone
- Steel sheet, powder coated
- Flange mounting

FAL 710 | 154812




- Mounting foot
- Sheet steel, powder coated

SGW 710 | 154056



- Protection grille, wide meshed
- Steel sheet, galvanized
- Flange mounting

SGE 710 | 154083



- Protection grille, narrow meshed
- Steel sheet, galvanized
- Flange mounting

FSD 07 | 155504



- Set of 4 vibration dampers
- Made of natural rubber, hardness 55 Shore A

RAF 710 | 154024



- Round flange
- Sheet steel, powder coated

RAS 710 | 154253




- Round spigot, flexible
- Galvanized steel sheet, plastic band (PES)
- Temperature resistant up to 75 °C
- Flange mounting

FSD 04 | 155501



- Set of 4 vibration dampers
- All metal design, galvanized

SGW 800 | 154057



- Protection grille, wide meshed
- Steel sheet, galvanized
- Flange mounting

MR 710 | 165872



- Mounting ring
- For vertical mounting
- Powder-coated sheet steel
- Flange mounting DN 710



ELECTRICAL ACCESSORIES

MS 03 | 140411



- Motor protection switch with Isolator switchfunktion
- $I_{max} = 400\text{ V}$, 50/60 Hz
- Max. 2.2 kW
- Protection class IP 55

MTP 20 | 128146



- Potentiometer 10 kΩ
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 kΩ
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage +10 Vdc

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

FU 22 32 | 155187



- Frequency converter IP66
- Supply voltage 230 V 1~ 50/60 Hz
- Output voltage 0 - 230 V 3~
- Fire mode function (smoke extract fans)

FU 22 34 | 155189



- Frequency converter
- Supply voltage 400 V 3~ 50/60 Hz
- Output voltage 0 - 400 V 3~
- Fire mode function (smoke extract fans)

FU 22 31 | 155186



- Frequency converter
- Supply voltage 230 V 1~ 50/60 Hz
- Output voltage 0 - 230 V 3~
- Protection class IP 20, for switch cabinet

FU 22 33 | 155188



- Frequency converter
- Supply voltage 400 V 3~ 50/60 Hz
- Output voltage 0 - 400 V 3~
- Protection class IP 20, for switch cabinet

GS 02 | 169671



- Isolator switch
- $U_{max} = 400\text{ V}$, 50/60 Hz
- Switching capacity 400 V 3~ = 7,5 kW
- $I_{max} = 25\text{ A}$

